



# Industrial Wood Coatings

CC-F70

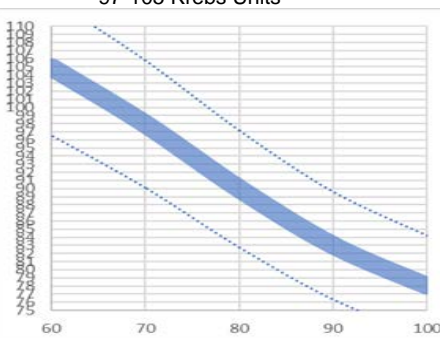
## SHER-WOOD® KEMVAR® Plus

### Conversion Varnish

Gloss White..... H66W51  
Mid Gloss White.....H66W52  
Low Gloss White.....H66W53  
Custom Blend.....H66PX Series

Low Gloss Blending Clear.....H66F55  
Gloss Blending Clear.....H66V54  
Low Gloss Black.....H66B56

Catalyst.....V66V21  
Standard Catalyst.....V66V20005  
Slow Catalyst.....V66V20006  
HF Fast Catalyst.....V66V20007

DESCRIPTION	CHARACTERISTICS	SPECIFICATIONS																										
<p><b>SHER-WOOD® KEMVAR® Plus Conversion Varnish</b> is a high solids catalyzed wood finishing system with full hiding opaque colors. It offers superior quality for furniture, cabinets and other interior wood products.</p> <p><b>Advantages:</b></p> <ul style="list-style-type: none"><li>• Meets the Federal HAPS rule for wood finishes as packaged**</li><li>• Available in a broad range of colors</li><li>• Can be applied by conventional, airless, air assisted airless or HVLP</li><li>• Meets KCMA test requirements when used over E63W50 or E63C56 surfacers</li><li>• High solids and build</li><li>• Good non-yellowing properties</li><li>• Excellent toughness and mar resistance</li><li>• Excellent moisture resistance</li><li>• Excellent resistance to household chemicals</li><li>• Suitable for solid hardwood and softwood , particle board, medium density fibreboard and veneers. Sher-Wood Kem Var Plus Surfacers E63W50 or E63C56 may be required to fill the substrate</li><li>• White and clears can be blended in all proportions</li></ul> <p>VOC compliance limits vary from state to state; please consult local Air Quality rules and regulations.</p> <p>An Environmental Data Sheet is available from your local Sherwin-Williams facility, or at <a href="http://www.paintdocs.com">www.paintdocs.com</a>.</p> <p><b>Air Quality Data (Theoretical):</b></p> <ul style="list-style-type: none"><li>• Photochemically reactive</li><li>• Volatile Organic Compounds (VOC) 3.1 lb/gal, 367 g/L</li><li>• Catalyzed 6.2% with V66V21 then reduced 45-55% with R7K310, maximum 4.46 lb/gal 535 g/L</li><li>• Volatile Hazardous Air Pollutants (VHAPS) as packaged, maximum less than 0.8 lbs per pound of solids</li></ul> <p><b>**National Standards for Hazardous Air Pollutants (HAPS) Emissions for Wood Furniture Manufacturing Operations CFR40, Part 63, Subpart JJ</b></p>	<p><b>Gloss:</b> Gloss 82-88 units Mid Gloss 47-53 units Low Gloss 13-18 units</p> <p><b>Volume Solids:</b> 60 ± 2% May vary by color</p> <p><b>Package Viscosity:</b> 97-105 Krebs Units</p> <div></div> <p><i>The above chart is for information only and should not be used as product specifications</i></p> <p><b>Recommended film thickness:</b> Mils Wet 3.0 - 5.0 Mils Dry 1.2 - 2.0</p> <p><b>Spreading Rate</b> (no application loss) catalyzed and reduced 50% 321-535 sq ft/gal @ 1.2-2.0 mils DFT</p> <p><b>Drying</b> (1.5 mils, 77°F, 50% RH): To Touch: 10-15 minutes To Handle: 20-30 minutes To Sand: 45-60 minutes To Recoat: 45-60 minutes Force Dry: 30 minutes at 110° F or 10 minutes at 150° F</p> <p><b>Flash Point:</b> 50-56°F PMCC</p> <p><b>Package Life:</b> 24 months, unopened</p> <p><b>Mixing Ratio:</b> <b>Catalyze</b> 1 part Conversion Varnish 6.2% (8 oz/gal) V66V21 (by volume) Or 20% (25.6 oz/gal) V66V20005 V66V20006 V66V20007 (by volume) <b>Reduce</b> 45-55% with R7K310</p> <p><b>Pot Life:</b> 24 hours</p>	<p><b>Wood</b> (interior only): Must be clean, dry, and finish sanded. Substrate should be free of grease, oil, dirt, fingerprints, and any contamination to ensure optimum adhesion and coating performance properties. Moisture content of wood should be 6 to 8%.</p> <p><b>Testing:</b> The information, data, and recommendations set forth in this Product Data Sheet are based upon test results believed to be reliable. However, due to the wide variety of substrates, substrate properties, surface preparation methods, equipment and tools, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.</p> <p><b>Household Chemical Tests (KCMA test):</b> Three milliliters of each item were placed on the vertical surface for 24 hours. The surface was then washed and dried per the specification.</p> <table><tr><td>Vinegar .....</td><td>no visual effect</td></tr><tr><td>Orange Juice .....</td><td>no visual effect</td></tr><tr><td>Lemon Juice .....</td><td>no visual effect</td></tr><tr><td>Grape Juice .....</td><td>no visual effect</td></tr><tr><td>Tomato Catsup .....</td><td>no visual effect</td></tr><tr><td>Coffee .....</td><td>no visual effect</td></tr><tr><td>Olive Oil .....</td><td>no visual effect</td></tr><tr><td>100 Proof Alcohol .....</td><td>no visual effect</td></tr><tr><td>Mustard - 1 hour .....</td><td>slight stain</td></tr><tr><td>recovers in 72 hours of indirect sunlight</td><td></td></tr><tr><td>Detergent/Water .....</td><td>no visual effect</td></tr><tr><td>Boiling Water .....</td><td>no visual effect</td></tr><tr><td>Butter .....</td><td>no visual effect</td></tr></table> <p><b>Moisture Resistance (KCMA test):</b> Pass 24 hours edge immersion in water/detergent solution at room temperature.</p> <p><b>Boiling Water Test:</b> ..... Pass</p> <p><b>Print Resistance</b> ..... No print</p> <p>Pigmented Varnish was air dried for 24 hours at room temperature (77°F) on maple at 3.0 mils dry film. Tested for 18 hours at 77°F at 1 psi in direct contact with 8 ounce duck cloth.</p>	Vinegar .....	no visual effect	Orange Juice .....	no visual effect	Lemon Juice .....	no visual effect	Grape Juice .....	no visual effect	Tomato Catsup .....	no visual effect	Coffee .....	no visual effect	Olive Oil .....	no visual effect	100 Proof Alcohol .....	no visual effect	Mustard - 1 hour .....	slight stain	recovers in 72 hours of indirect sunlight		Detergent/Water .....	no visual effect	Boiling Water .....	no visual effect	Butter .....	no visual effect
Vinegar .....	no visual effect																											
Orange Juice .....	no visual effect																											
Lemon Juice .....	no visual effect																											
Grape Juice .....	no visual effect																											
Tomato Catsup .....	no visual effect																											
Coffee .....	no visual effect																											
Olive Oil .....	no visual effect																											
100 Proof Alcohol .....	no visual effect																											
Mustard - 1 hour .....	slight stain																											
recovers in 72 hours of indirect sunlight																												
Detergent/Water .....	no visual effect																											
Boiling Water .....	no visual effect																											
Butter .....	no visual effect																											

## APPLICATION

### Typical Setups

Reduce 45-55% with R7K310 - Sher-Wood KemVar Solvent.

Example: Reduction with 50% R7K310 provides a ready to spray topcoat with these listed characteristics:

For example Low Gloss White H66W53:

**Weight Solids:** 55.8%

**Volume Solids:** 39.5%

**Viscosity #2 Zahn:** 18-22 sec.

**VOC per gal:** 4.16 lb/gal, 499 gm/l

### Conventional Spray:

Air Pressure ..... 40-50 psi

Fluid Pressure ..... 6-8 psi

### Airless Spray:

Pressure ..... 1200-1800 psi

Tip ..... .011-.015"

### Air Assisted Airless:

Fluid Pressure ..... 600-700 psi

Cap/Tip ..... .011-.015"

### HVLP:

Air Pressure ..... 9 psi

Fluid Pressure ..... 5-10 psi

Tip ..... .047

### Cleanup:

Clean tools/equipment immediately after use with HAPS Compliant Lacquer Thinner R7K320. Lacquer Thinner R7K120 or R7K22 may also be used, but are not HAPS compliant.

Follow manufacturer's safety recommendations when using any solvent.

## SPECIFICATIONS

### Product Limitations:

- Sher-Wood KemVar Plus Conversion Varnish must be catalyzed 6.2% by volume with KemVar Catalyst V66V21 for cure. Do not over-catalyze. Higher catalyst levels may cause cracking over time. Higher catalyst levels affect crosslinking rates and film properties.
- Must catalyze and reduce to spray.
- Temperatures must be above 70°F during application and cure to ensure acceptable coating properties. Coatings cured at lower temperatures are prone to cracking, checking, and brittleness. Do not pack or stack finished parts with less than the dry time listed below:

Board	Surface Temperature	Time
	150°F	10 minutes
or	120°F	30 minutes
or	70°F	24 hours

(continued in next column)

## SPECIFICATIONS

### Product Limitations Continued:

- If a primer surfacer is needed, use E63W50 or E63C56 Sher-Wood KemVar Plus Surfacer
  - Do not apply over nitrocellulose lacquer sealers, as they may cause wrinkling or long-term checking or cracking.
  - Gloss Blending Clear or Low Gloss Blending Clear are intended for custom blending. They are not recommended as clear topcoats. For a clear over white varnish, Sher-Wood Water White Conversion Varnish (V84V80 series) is recommended because of its resistance to yellowing.
  - KemVar Catalyst V66V21 is an acid. To prevent acid corrosion and pitting, all equipment should be made of stainless steel. Containers and piping should be stainless steel or plastic. Acid reacting with iron or steel will cause a discoloration of conversion varnish.
  - Maximum film thickness of the total system (including Surfacer) must not exceed 7 mils dry film because heavier films may cause cracking.
  - Do not use in recirculating systems such as flowcoaters or curtain coaters because of accelerated cure due to aeration. Recirculating paint lines are okay.
  - Working pot life is 24 hours maximum at 77°F. While catalyzed varnish remains a low viscosity liquid beyond 24 hours, it should not be used beyond pot life because a chemical reaction is taking place. The resultant film may have inferior cure and crosslinking and a tendency for long term cold checking. At higher temperatures working pot life is much shorter.
  - To maintain HAPS compliance only reduce with HAPS compliant reducers.
  - To extend the pot life at the end of the day, add 300-400% of uncatalyzed material. Add catalyst based only on the uncatalyzed portion when ready to use the next day. Refrigeration extends the working pot life.
  - Do not blend Sher-Wood KemVar Plus Conversion Varnish with other conversion varnish qualities because it will dramatically reduce performance with cracking and checking problems.
  - Maximum colorant level is 6 ounces per gallon with Phoenix® / 844 or OptiColor® XP colorants. Exceeding 6 ounces of colorant may cause colorant float and may extend dry times.
  - Do not exceed 2.0 mils dry film per coat because heavy wet films may cause film surface imperfections and slow dry time.
  - For full sharp gloss appearance, sand intermediate coats with very fine (400-600) grit paper to prevent telegraphing of sand marks.
  - For interior use only.
- All trademarks are the property of their respective owners.

## CAUTIONS

### FOR INDUSTRIAL SHOP APPLICATION ONLY

**Thoroughly review product label and Safety Data Sheet (SDS) for safety information and cautions prior to using this product.**

To obtain the most current version of the Environmental Data Sheet (EDS), Product Data Sheet (PDS), or Safety Data Sheet (SDS) please visit your local Sherwin-Williams facility or [www.paintdocs.com](http://www.paintdocs.com).

Please direct any questions or comments to your local Sherwin-Williams facility.

**Note:** All purchases of products from Sherwin-Williams are exclusively subject to Sherwin-Williams' terms and conditions of sale which can be found [by following this link \(click here\)](#). Please review these terms and conditions prior to the purchase of the products.

Sherwin-Williams warrants the product to be free of manufacturing defect in accordance with Sherwin-Williams' quality control procedures. Except for the preceding sentence, due to factors that are outside of Sherwin-Williams' control, including substrate selection, and customer handling, preparation, and application, Sherwin-Williams cannot make any other warranties related to the product or the performance of the product. **SHERWIN-WILLIAMS DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.**

Liability for products proven to be defectively manufactured will be limited solely to replacement of the defective product or the refund of the purchase price paid for the defective product, as determined by Sherwin-Williams. Under no circumstances shall Sherwin-Williams be liable for indirect, special, incidental or consequential damages, lost profits or punitive damages arising from any cause whatsoever.